

**Features :**


- 100-264VAC
- Protection: Short circuit/overload/overvoltage
- Working temperature with 60°C
- Cooling by free air convection
- 100% full load burn-in test
- 3years warranty
- Support: DALI

**Specification**


CE RoHS BIS SELV IP20

	Model	HRS-60-12	HRS-60-24
<b>Output</b>	DC Voltage	12V	24V
	Voltage Tolerance	±0.5V	
	Rated Current	0 – 5A	0 – 2.5A
	Rated Power	60W	60W
	Ripple & Noise	120mVp-p	150mVp-p
<b>Input</b>	Voltage Range	100-264VAC	
	Frequency Range	50 – 60HZ	
	Power Factor	PF ≥ 0.5/220VAC (Full loading)	
	Full Load Efficiency(Typ.)	85%	85%
	AC Current (Max.)	0.61A	0.58A
	Leakage current	<0.5mA/260VAC	
	Inrush current	≤ 40A	
<b>Protection</b>	Short Circuit	Protection type: Hiccup mode, recovers automatically after fault condition is removed.	
	Over Load	Hiccup mode, recovers automatically after fault condition is removed	
	VIBRATION	10-500Hz 2G10min	
	BURN-IN TEST	Input voltage: 220V 50Hz rated output current 25°C Burn-in 2h	
<b>Environment</b>	Over temperature	100°C±10°C shut down o/p voltage, re-power on to recover	
	Working TEMP.	-20 ~ + 50°C	
	Working Humidity	20~60%RH, non-condensing	
	Storage TEM., Humidity	-20~+ 85%, 10~95%RH	
	START RISE HOLD TIME	1500ms, 20ms, 50ms/230VAC at full load	
<b>Safety &amp; EMC</b>	Vibration	10 – 500Hz, 5G 12min./1 cycle, period for 60min. each along X, Y, Z axes.	
	Safety standards	CE Mark	
	Withstand voltage	I/P-O/P: 1.5KVAC I/P-GND: 1.5KVAC	
	EMC Immunity	EN55015:2013; EN61547:2009; EN61000-3-2:2014; EN61000-3-3:2013	
<b>Others</b>	Weight	0.22Kg	
	Dimension	187x49x29mm(LxWxH)	
	Packing	60pcs/CTN	
<b>Notes</b>	<ol style="list-style-type: none"> <li>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</li> <li>2. Tolerance: includes set up tolerance, line regulation and load regulation.</li> <li>3. The power supply is considered as a component that will be operated in combination with final Equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must be qualified EMC Directive on the complete installation again.</li> </ol>		

**Mechanical Specification**

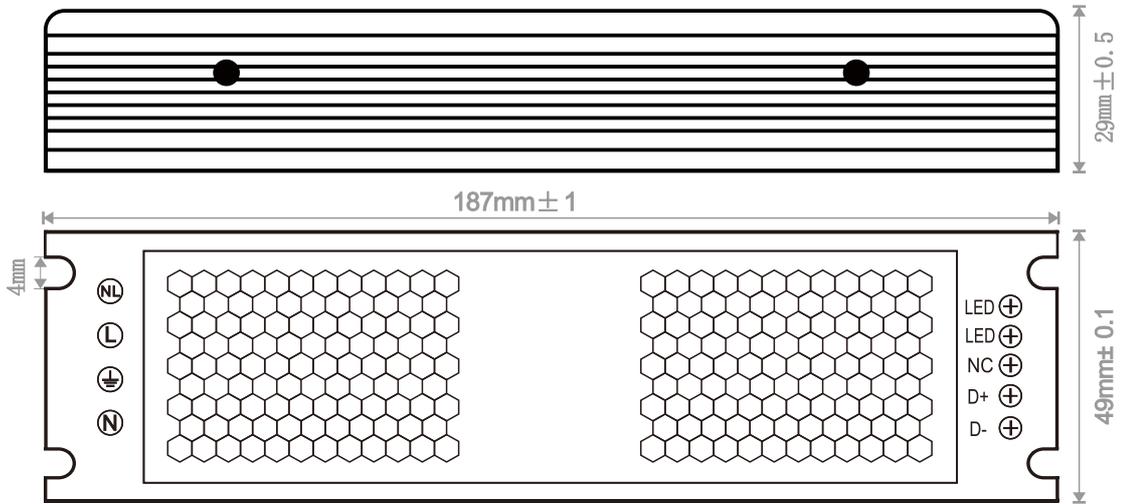

**Derating Curve**

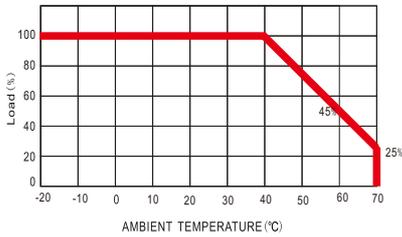

**Package**

DIMENSION	187x49x29(mm) (LxWxH)
CARTON QUANTITY	60PCS/Carton
CARTON SIZE	41.2x23.2x30(cm)
WEIGHT	220g/PCS

**Dali wiring Diagram**

